




TX



\ CHARPENTE

TÊTE FRAISÉE EMPREINTE ÉTOILE

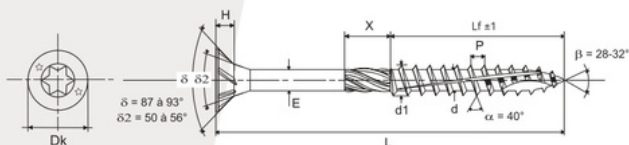

CARACTÉRISTIQUES TECHNIQUES

	Ø 6	Ø 8
Profondeur empreinte	2,40 / 2,85	3,00 / 3,45
N° empreinte	TX 30	TX 40
Dk	11,75 ± 0,25	14,50 ± 0,50
H	3,70	4,00
E	4,25	5,80
d	3,65 / 3,95	5,05 / 5,45
d1	5,80 / 6,20	7,75 / 8,25
P	4,50 ± 10%	5,20 ± 10%
x	11,00 / 13,00	11,00 / 13,00
Couple de rupture mini	-- Nm	-- Nm

Ø6-Ø8 L totale = 60/400

Tolérance L ± 1,00




EN 14592
+A1 2012

\ Acier zingué blanc

CHARPENTE

TÊTE FRAISÉE EMPREINTE ÉTOILE



CE
EN 14592
+A1 2012



Ø	Longueur totale (L)	Longueur filetée (Lf)	Numéro embout	Type de bête	Quantité bête
6	60	30	TX 30	K4	200
	70	40	-	K4	150
	80	40	-	K3	100
	90	50	-	K3	100
	100	50	-	K3	100
	120	75	-	K3	100
	140	75	-	K4	100
	160	75	-	K4	100
	180	75	-	K7	100
	200	75	-	K7	100
	220	75	-	S6	100
	240	75	-	S6	50
	260	75	-	S6	50
	280	75	-	S7	50
	300	75	-	S7	50
8	80	50	TX 40	K4	100
	90	50	-	K4	100
	100	50	-	K7	100
	120	80	-	S6	100
	140	80	-	K4	50
	160	80	-	K4	50
	180	80	-	K7	50
	200	100	-	K7	50
	220	100	-	S6	50
	240	100	-	S6	50
	260	100	-	S6	50
	280	100	-	S7	50
	300	100	-	S7	50
	320	100	-	S7	50
	340	100	-	S7	50
	360	100	-	S8	50
	380	100	-	S8	50
	400	100	-	S8	50

Acier zingué blanc

